

## NO4\*BB4D-A

opticalCON 4 breakout box: 1 x NO4FDW-A to 4 x NO2-4FDW-A (channel A connected)




The breakout boxes are used to split a 4-channel point-to-point opticalCON QUAD connection. In mated condition the boxes are dust and water resistant acc. protection class IP 65. The closed boxes are protected according to IP67.




Product	NO4MBB4D-A	NO4SBB4D-A	NO4SABB4D-A
Fiber Mode	multi-mode PC	single-mode PC	single-mode APC
Color Coding	Black	Blue	Green

### Equipment, e.g.

- Monitors
- Multiplex (send/return) signals
- Embedded signals (Audio + Video + Data)

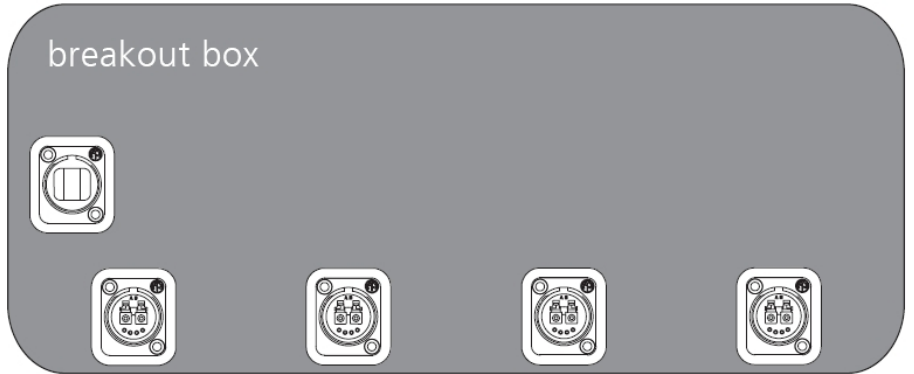

Channel A wired only



send



return



send/return



send/return