



REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2020/03/26	

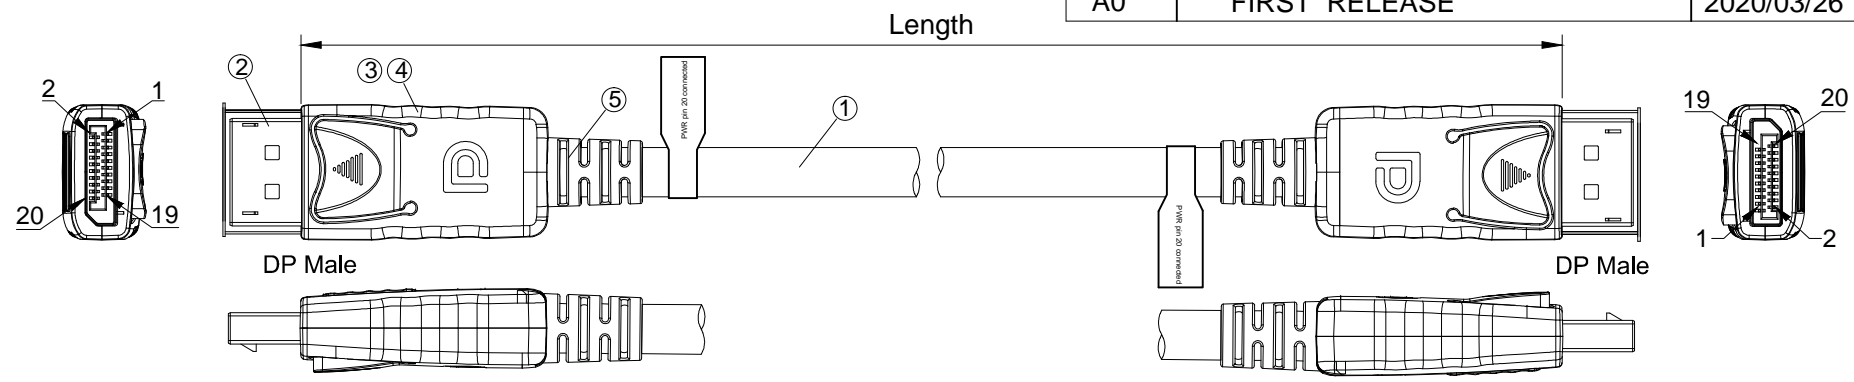


Signal Assignment

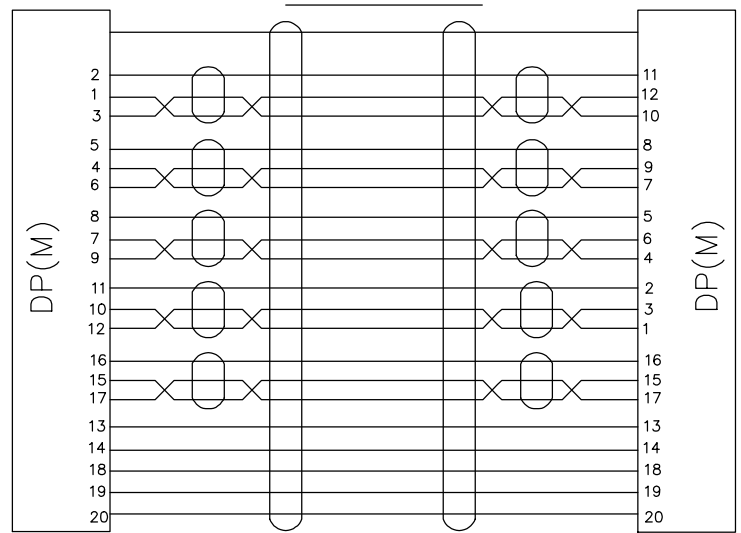

Remark:


- 100% Open/Short Test
- Conductive Resistance:5ohms MAX
- Insulation Resistance:10M ohm MIN.
- HI-POT:DC 300V/10MS.
- The product is RoHS compliant.
- Support 4K*2K@60Hz;
- Pin 20 connected

Cable Spec.

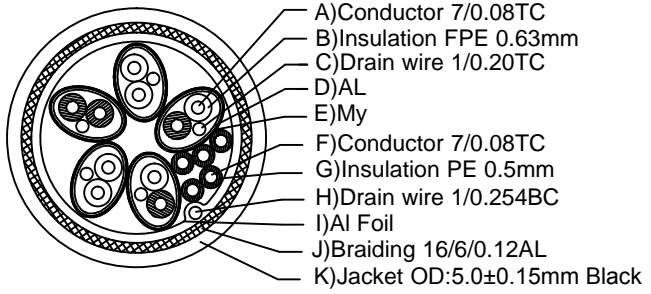

Item NO.	Length(m)
AK3977	0.5m
AK3978	1.0m
AK3980	2.0m
AK3981	3.0m

⑤	SR	45P PVC, Black	2PCS	
④	Shell	Top and Bottom Shell, ABS with "D"Black	2SETs	
③	Inernal Mold	Inner Mould PE	2PCS	
②	Connector	DP male head hook, Nickel Plated	2PCS	
①	Cable	(1Px32AWG +D+AL)x5p+5Cx32AWG+ML+AL+D +B; OD5.0mm PVC,Black		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK



ERP NO.:		SAMPLE DWG NO.:		
DOC No.:		REVISION	A0	
CUSTOMER:		UNIT	mm	
CUSTOMER P/N:		SCALE	NO	
DESCRIPTION		Dp to Dp Cable	PAGE NO	1/1
			DATE	2020/03/26
APPROVAL	CHECKED	DRAWN		