






MAX465H125S-HDS

 502 x 415 x H141 mm
19.76 x 16.34 x H5.55 inch.

 465 x 335 x H125 mm
18.31 x 13.19 x H4.92 inch.

 40 + 85 mm
1.57 + 3.35 inch.

 VERSION S: 2,92 kg / 6.43 lb
VERSION HDS 3,42 kg / 7.53 lb

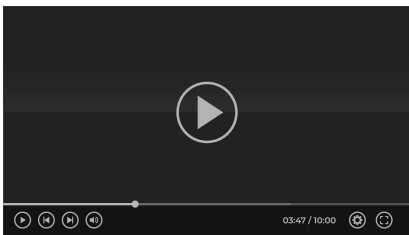

HIGH DENSITY
CUBED FOAM
VIDEO



- **WATERTIGHT SEAL AROUND LID** / GUARNIZIONE ERMETICA
- **AUTOMATIC PRESSURE RELEASE VALVE** / VALVOLA AUTOMATICA DI PRESSURIZZAZIONE
- **EASY TO OPEN DOUBLE THROW LATCHES** / CHIUSURE DI SICUREZZA A DOPPIO STEP
- **LOAD TESTED SOFT GRIP HANDLE** / MANICO MORBIDO AD ALTA ERGONOMICITÀ
- **STACKABLE INTERLOCKING SYSTEM** / SISTEMA DI IMPILABILITÀ
- **THICK BODY MATERIAL** / PARETI SPESSIE ANTIURTO
- **EXTRA FIXING POINTS** / PUNTI DI FISSAGGIO PER VARIE APPLICAZIONI
- **FULLY LENGTH HINGES** / CERNIERA LUNGO TUTTO IL PROFILO DELLA VALIGIA
- **NYLON PINS, CORROSION FREE** / PERNI IN NYLON ANTI CORROSIONE
- **SCREEN PRINTING AND RESIN LABEL SPACE** / SERIGRAFIA ED ETICHETTA RESINATA
- **MATERIAL: POLYPROPYLENE COPOLYMER** / MATERIALE: POLIPROPILENE COPOLIMERO
- **LATCHES: NYLON** / SERRATURE IN NYLON
- **O-RING: POLYMER** / GUARNIZIONE POLIMERO


- **INTERNAL CUBIC VOLUME: 19471875 CUBIC MM - 0.69 CUBIC FEET** / VOLUME: 19471875 MM CUBI
- **VOLUME CAPACITY: 19.47 LT** / CAPACITÀ: 19.47 LT
- **PCS PER CARTON: 1** / PEZZI PER CARTONE: 1
- **WEIGHT OF THE FULL CARTON: 3.54 KG - 7.8 LBS.** / PESO DEL CARTONE: 3.54 KG
- **MOULDING: INJECTION MOLDED** / STAMPAGGIO: AD INIEZIONE
- **RANGE TEMPERATURE: -30 / 90°C (-22 / 194°F)** / RANGE DI TEMPERATURA: -30 / 90°C (-22 / 194°F)
- **ACCESSORIES: CUBED & CONVOLUTED FOAMS - LID ORGANIZER - PANELS - SHOULDER STRAP** / SPUGNE CUBETTATE & SPUGNE BUGNATE - TASCA ORGANIZER - PANNELLI - TRACCOLLA IMBOTTITA

IP67 RATING


ATA 300

MIL SPECS


DEF STAN 81-41
STANAG 4280



+



+



=



Base foam

1 x 10 mm / 1 x 0.39 inch

Cubed foam

2 x 35 mm / 2 x 1.38 inch


Convuluted foam

1 x 35 mm / 1 x 1.38 inch


MAX465H125S



+



+



=



Base foam

1 x 10 mm / 1 x 0.39 inch

High Density Cubed foam

2 x 35 mm / 2 x 1.38 inch

Convuluted foam

1 x 35 mm / 1 x 1.38 inch

MAX465H125HDS