

- New Generation:**
- Very solid metal door hinges
 - No cabling effort anymore due to plug & play fan unit
 - Suitable for feet or castors (e.g. for use as desktop housing)

Door with solid metal hinges




Feet or castors (M8) available as accessory (not included in delivery)



Plug & Play fan unit incl. thermostat Art.-No. 691656GR (not included in delivery)



Rear side with cable entries and mounting holes (side walls not detachable)

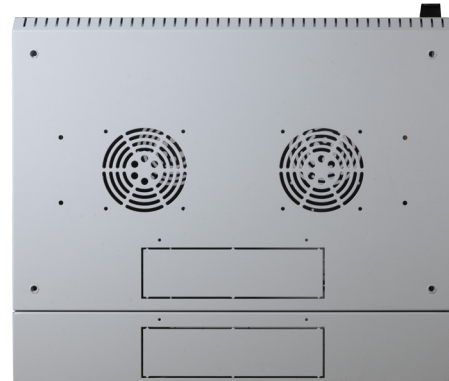

Roof and bottom with cutouts for plug & play fan unit
Bottom with M8 threads for feet or castors

Common specifications

- Steel sheet housing with welded frame, pre-assembled, self-ventilated
- Rear sided swing-frame for swiveling the front part of the housing
- **NEW: Prepared for Plug & Play 2-fan unit Art.-No. 691656xx**
- **NEW: Bottom with 4 x mounting point M8 for leveling feet or castor set (please order separately)**
- **NEW: Front door with metal hinges for increased stability**
- Pre-punched openings for cable entry optionally from roof or bottom
- Inside front-sided 2 x 19" profile rails, galvanised, depth-adjustable
- Front door with window made of certified safety glass (4 mm)
- Front door lockable with latch
- Internal earthing of all cabinet sections
- Paint finish: RAL7035, light grey / RAL9005, jet black
- Protection degree IP20
- Included in delivery: 1 x brush terminal, 1 x set of captive nuts (PU 20 pcs.), 2 x key
- Delivery in transport packaging, from 30 kg / 12U on disposable pallet

Order data see next page !



Art.-Nr.	6916xxVxx.yy	Datei	6916xxVxx_YY.indd		
Beschreibung	19" Wandgehäuse schwenkend, 2-teilig				
Erstellt	Datum	Letzte Revision	Datum	Geprüft	Datum
MN	21.03.2018	MN	11.07.2019	MN	11.07.2019

DATASHEET

19" Wall Housing Swiveling, 2-Part, RAL7035/RAL9005, Depth 500/600 mm

Art.-No. 6916xxVxx.yy

Order Data

Wall Housing Depth = 500 mm						
Art.-No. RAL7035	Art.-No. RAL9005	U	Height	Width	Depth	Max. Load
691604VGR.50	691604VTS.50	4	240 mm	600 mm	400 mm	30 kg
691606VGR.50	691606VTS.50	6	330 mm	600 mm	400 mm	40 kg
691609VGR.50	691609VTS.50	9	465 mm	600 mm	400 mm	40 kg
691612VGR.50	691612VTS.50	12	600 mm	600 mm	400 mm	40 kg
691615VGR.50	691615VTS.50	15	730 mm	600 mm	400 mm	50 kg
691618VGR.50	691618VTS.50	18	800 mm	600 mm	400 mm	50 kg
691621VGR.50	691621VTS.50	21	997 mm	600 mm	400 mm	50 kg

Wall Housing Depth = 600 mm						
Art.-No. RAL7035	Art.-No. RAL9005	U	Height	Width	Depth	Max. Load
691604VGR.60	691604VTS.60	4	240 mm	600 mm	500 mm	30 kg
691606VGR.60	691606VTS.60	6	330 mm	600 mm	500 mm	40 kg
691609VGR.60	691609VTS.60	9	465 mm	600 mm	500 mm	40 kg
691612VGR.60	691612VTS.60	12	600 mm	600 mm	500 mm	40 kg
691615VGR.60	691615VTS.60	15	730 mm	600 mm	500 mm	50 kg
691618VGR.60	691618VTS.60	18	800 mm	600 mm	500 mm	50 kg
691621VGR.60	691621VTS.60	21	997 mm	600 mm	500 mm	50 kg

Accessories and Spare Parts		
Art.-No.	Description	Remark
691656GR	Fan Unit 2-Way, incl. Thermostat, RAL7035, Plug & Play for Wall Housing Types Fixed / FLAT / IP55 / BASIC	Power cable C13 required, e.g. EK504.x
691656TS	Fan Unit 2-Way, incl. Thermostat, RAL9005, Plug & Play for Wall Housing Types Fixed / FLAT / IP55 / BASIC	
OFF-NIV01	Leveling Feet 4 Pieces M8, for Cabinet Series OFFICE and Wall Housing Fixed 1-Part & 2-Part	
OFF-ROL01	Castor Set 80 kg, for Cabinet Series OFFICE and Wall Housing Fixed 1-Part & 2-Part	
102131.1	Metal Hinge 3-Parts for Front Door Wall Housing Fixed 1-Part & 2-Part	PU = 1 Hinge
102263	Plastic Handle for Wall Housing Fixed	Spare Part
102266	Spare Lock for Wall Housing Fixed	Spare Part
102130GR.xx	Front Door for Wall Housing Fixed 1-Part & 2-Part, with Window (Glass), xx = 04 / 06 / 09 / 12 / 15 / 18 / 21 U	
102130GR.xxS	Front Door for Wall Housing Fixed 1-Part & 2-Part, Steel Door, xx = 04 / 06 / 09 / 12 / 15 / 18 / 21 U	



Art.-Nr.	6916xxVxx.yy	Datei	6916xxVxx_YY.indd		
Beschreibung	19" Wandgehäuse schwenkend, 2-teilig				
Erstellt	Datum	Letzte Revision	Datum	Geprüft	Datum
MN	21.03.2018	MN	11.07.2019	MN	11.07.2019