





MAX001S-HDS

 175 x 115 x H47 mm
6.88 x 3.22 x H1.61 inch.

 157 x 82 x H41 mm
6.18 x 3.22 x H1.61 inch.

 12 + 29 mm
0.47 + 1.14 inch.

 VERSION S: 0,12 kg / 0.26 lb
VERSION HDS: 0,163 kg / 0,35 lb




- WATERTIGHT SEAL AROUND LID / GUARNIZIONE ERMETICA
- AUTOMATIC PRESSURE RELEASE VALVE / VALVOLA AUTOMATICA DI PRESSURIZZAZIONE
- STACKABLE INTERLOCKING SYSTEM / SISTEMA DI IMPILABILITÀ
- THICK BODY MATERIAL / RESISTENZA AGLI URTI
- SCREEN PRINTING AND RESIN LABEL / SERIGRAFABILE E CON ETICHETTA RESINATA
- BODY: POLYPROPYLENE COPOLYMER / FONDO E COPERCHIO: POLIPROPILENE COPOLIMERO
- LATCHES: NYLON / SERRATURE: NYLON
- O-ring: polymer / GUARNIZIONE: POLIMERO


- INTERNAL CUBIC VOLUME: 527834 CUBIC MM - 0.0186 CUBIC FEET / VOLUME: 527834 MM CUBI
- VOLUME CAPACITY: 0.527 LT / CAPACITÀ: 0.527 LT
- PCS PER CARTON: 12 / PEZZI PER CARTONE: 12
- WEIGHT OF THE FULL CARTON: 2.08 KG - 4.58 LBS. / PESO DEL CARTONE: 2.08 KG
- MOULDING: INJECTION MOLDED / STAMPAGGIO: AD INIEZIONE
- RANGE TEMPERATURE: -10 / 80°C (14 / 176°F) / RANGE DI TEMPERATURA: -10 / 80°C (14 / 176°F)
- ACCESSORIES: CUBED FOAMS / CONVOLUTED FOAMS / ACCESSORI: SPUGNE CUBETTATE / SPUGNE BUGNATE

IP67 RATING


MADE IN ITALY

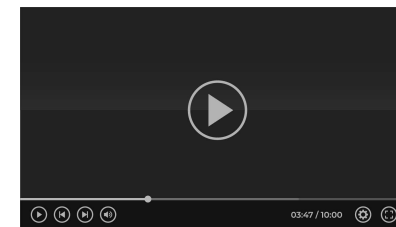


HIGH DENSITY CUBED FOAM VIDEO



+



+



=



Base foam

1 x 5 mm / 1 x 0.2 inch


Cubed foam

1 x 25 mm / 1 x 0.98 inch


Convuluted foam

1 x 12 mm / 1 x 0.47 inch


MAX001S



+



+



=



Base foam

1 x 5 mm / 1 x 0.2 inch


High Density Cubed foam

1 x 25 mm / 1 x 0.98 inch


Convuluted foam

1 x 12 mm / 1 x 0.47 inch


MAX001HDS



+



+



=



Base foam

1 x 5 mm / 1 x 0.2 inch

Convuluted foam

1 x 25 mm / 1 x 0.98 inch

Convuluted foam

1 x 12 mm / 1 x 0.47 inch

MAX001GPB