






MAX505S - HDS

 555 x 428 x H211 mm
21.85 x 16.85 x H8.31 inch.

 500 x 350 x H194 mm
19.69 x 13.78 x H7.64 inch.

 58 + 136 mm
2.28 + 5.36 inch.

 VERSION S: 4,38 kg / 9.65 lb
VERSION HDS: 5,28 kg / 11.64 lb

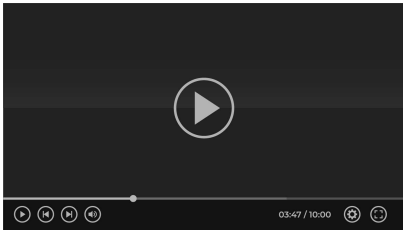


HIGH DENSITY
CUBED FOAM
VIDEO




- **WATERTIGHT SEAL AROUND LID / GUARNIZIONE ERMETICA**
- **AUTOMATIC PRESSURE RELEASE VALVE / VALVOLA AUTOMATICA DI PRESSURIZZAZIONE**
- **EASY TO OPEN DOUBLE THROW LATCHES / CHIUSURE DI SICUREZZA A DOPPIO STEP**
- **LOAD TESTED SOFT GRIP HANDLE / MANICO MORBIDO AD ALTA ERGONOMICITÀ**
- **STACKABLE INTERLOCKING SYSTEM / SISTEMA DI IMPILABILITÀ**
- **THICK BODY MATERIAL / PARETI SPESSE ANTIURTO**
- **EXTRA FIXING POINTS / PUNTI DI FISSAGGIO PER VARIE APPLICAZIONI**
- **FULLY LENGTH HINGES / CERNIERA LUNGO TUTTO IL PROFILO DELLA VALIGIA**
- **NYLON PINS, CORROSION FREE / PERNI IN NYLON ANTI CORROSIONE**
- **SCREEN PRINTING AND RESIN LABEL SPACE / SERIGRAFIA ED ETICHETTA RESINATA**
- **MATERIAL: POLYPROPYLENE COPOLYMER / MATERIALE: POLIPROPILENE COPOLIMERO**
- **LATCHES: NYLON / SERRATURE IN NYLON**
- **O-RING: POLYMER / GUARNIZIONE POLIMERO**

- **INTERNAL CUBIC VOLUME: 33950000 CUBIC MM - 1.199 CUBIC FEET / VOLUME: 33950000 MM CUBI**
- **VOLUME CAPACITY: 33.95 LT / CAPACITÀ: 33.95 LT**
- **PCS PER CARTON: 1 / PEZZI PER CARTONE: 1**
- **WEIGHT OF THE FULL CARTON: 5.22 KG - 11.5 LBS. / PESO DEL CARTONE: 5.22 KG**
- **MOULDING: INJECTION MOLDED / STAMPAGGIO: AD INIEZIONE**
- **RANGE TEMPERATURE: -30 / 90°C (-22 / 194°F) / RANGE DI TEMPERATURA: -30 / 90°C (-22 / 194°F)**
- **ACCESSORIES: CUBED & CONVOLUTED FOAMS - PADDED DIVIDERS - LID ORGANIZER - SHOULDER STRAP / SPUGNE CUBETTATE & SPUGNE BUGNATE - DIVISORIE IMBOTTITE - TASCA ORGANIZER - TRACCOLLA IMBOTTITA**


IP67 RATING **ATA 300** **MIL SPECS** DEF STAN 81-41
STANAG 4280



+



+



=



Base foam

1 x 20 mm / 1 x 0.79 inch


Cubed foam

2 x 55 mm / 2 x 2.16 inch


Convuluted foam

1 x 50 mm / 1 x 1.97 inch


MAX505S



+



+



=



Base foam

1 x 20 mm / 1 x 0.79 inch

High Density Cubed foam

2 x 55 mm / 2 x 2.16 inch

Convuluted foam

1 x 50 mm / 1 x 1.97 inch

MAX505HDS