


# DATASHEET

## 19" 1U Socket Strip 6 x C19, 3-Phase

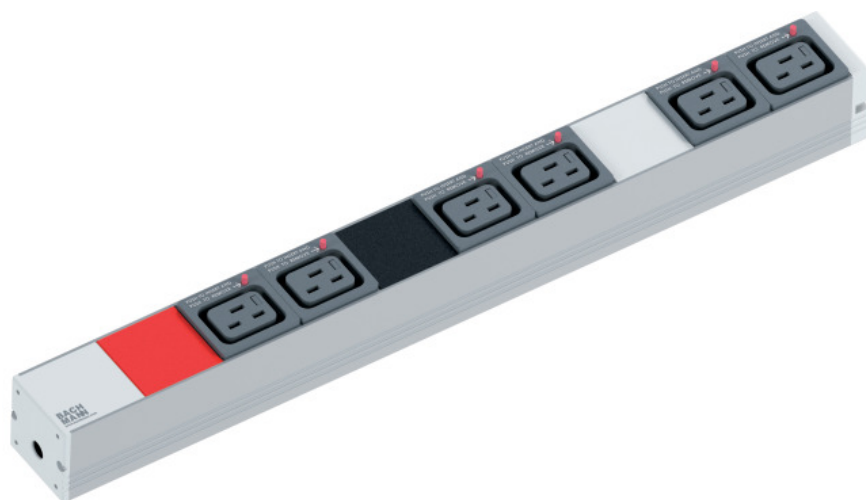

### Description

Aluminium profile height 44 mm, depth 47 mm, width ca. 438 mm  
 Outlets 6 x IEC C19 (2 x C19 per phase)  
 3-phase feeding with colour marking (red/black/grey)  
 Cable H05VV-F 5G 2.5 mm<sup>2</sup> with CEE 16 A plug 5-pole red, length 3.0 m  
 Supplied 19" mounting brackets allow any fastening position

### General data

Material	metal
Material quality	Thermoplastic
Housing shape	Rectangular
Mains filter	False
Over voltage protection	False
Nominal current	16 A
Core cross section	2.50 mm <sup>2</sup>
With cover	False
Halogen free	False
Surface treatment	anodising
Type of surface	Not applicable
Degree of protection (IP)	IP20
Rotated central insert	True
Residual current circuit breaker (RCCB)	False
Transparent	False

This datasheet was created automatically on 24-11-2020 . Technical changes reserved.



# DATASHEET

## 19" 1U Socket Strip 6 x C19, 3-Phase

### General data

Length of power cord | 3.0 m

### Available variants

Article no.	Title	On/Off switch	Number of cold device socket outlets	Colour
691780	19" 1U Socket Strip 6 x C19, 3-Phase, Plug CEE 16 A red	False	6	grey

This datasheet was created automatically on 24-11-2020 . Technical changes reserved.

