
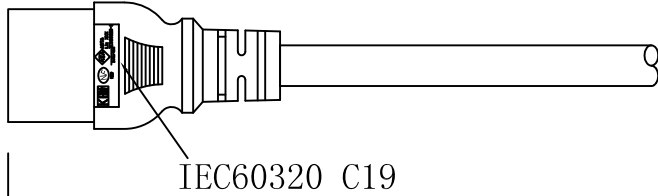



1	2	3
CUSTOMER NAME	資擎	
CUSTOMER Part No.		



7	8	9	10
DATE	REV	DESCRIPTION	BY
2013. 4. 7	A/0	NEW	Lisa
2013. 4. 12	A/1	修改ITEM	Lisa

PLUG MARKING:




IEC60320 C19

IEC 60320 C20



⚠ Length

ITEM NO.	COLOR	RAL NO.	LENGTH(M)
AK5085	Black	RAL9011	0.6
AK5086	Black	RAL9011	1.2
AK5023	Black	RAL9011	2
AK5087	Black	RAL9011	3
AK5088	Red	RAL 3020(1797C)	0.6
AK5089	Red	RAL 3020(1797C)	1.2
AK5090	Red	RAL 3020(1797C)	1.8
AK5091	Red	RAL 3020(1797C)	3
AK5092	Blue	RAL5012(7461C)	0.6
AK5093	Blue	RAL5012(7461C)	1.2
AK5094	Blue	RAL5012(7461C)	1.8
AK5095	Blue	RAL5012(7461C)	3
AK5096	Green	RAL 6018(375C)	0.6
AK5097	Green	RAL 6018(375C)	1.2
AK5098	Green	RAL 6018(375C)	1.8
AK5099	Green	RAL 6018(375C)	3
AK5100	Yellow	RAL 1018(109C)	0.6
AK5101	Yellow	RAL 1018(109C)	1.2
AK5102	Yellow	RAL 1018(109C)	1.8
AK5103	Yellow	RAL 1018(109C)	3

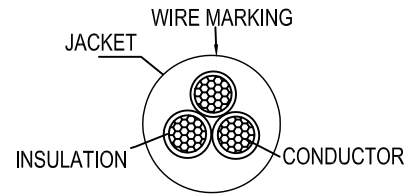

REMARKS:

- 1.POLARIZATION AND CONTINUITY TEST
- 2.5.DVW TEST:2000VAC,1S
- 3.CONNECTOR(SF-300) RATED POWER:250V 16A
- 4.PLUG(SF-301) RATED POWER:250V 16A
- 5.WIRE: H05VV-F 3X1.5mm² RATED VOLTAGE:300/500V
- 6.COLOR:BLACK

PAGE	1/1						
Key Size	⚠						
ROHS COMPLIANT			Part No. SF-300+SF-301 H05VV-F3X1.5mm ²				
Unless specified on the drawing, tolerances are per the follows: . ± 0.5 .X ± 0.1 .XX ± 0.05			Description				
3RD			DEP.	R&D	APPROVAL	CHECKER	DRAW
			SCALE			Lisa Peng	
			UNIT	mm			