






MAX540H245S-HDS

 594 x 473 x H270 mm
23.39 x 18.62 x H10.63 inch.

 538 x 405 x H245 mm
21.18 x 15.94 x H9.64 inch.

 50 + 195 mm
1.97 + 7.68 inch.


 VERSION S: 6.16 kg / 13.58 lb
VERSION HDS: 8.00 kg / 17.63 lb

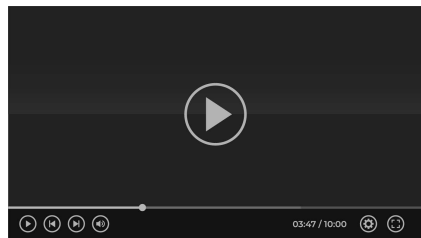

HIGH DENSITY
CUBED FOAM
VIDEO



SIDE HANDLES
MANIGLIA LATERALE
SU ENTRAMBI I LATI



- WATERTIGHT SEAL AROUND LID / GUARNIZIONE ERMETICA
- AUTOMATIC PRESSURE RELEASE VALVE / VALVOLA AUTOMATICA DI PRESSURIZZAZIONE
- EASY TO OPEN DOUBLE THROW LATCHES / CHIUSURE DI SICUREZZA A DOPPIO STEP
- LOAD TESTED SOFT GRIP HANDLE / MANICO MORBIDO AD ALTA ERGONOMICITÀ
- STACKABLE INTERLOCKING SYSTEM / SISTEMA DI IMPILABILITÀ
- THICK BODY MATERIAL / PARETI SPESSE ANTIURTO
- EXTRA FIXING POINTS / PUNTI DI FISSAGGIO PER VARIE APPLICAZIONI
- FULLY LENGTH HINGES / CERNIERA LUNGO TUTTO IL PROFILO DELLA VALIGIA
- NYLON PINS, CORROSION FREE / PERNI IN NYLON ANTI CORROSIONE
- SCREEN PRINTING AND RESIN LABEL SPACE / SERIGRAFIA ED ETICHETTA RESINATA
- MATERIAL: POLYPROPYLENE COPOLYMER / MATERIALE: POLIPROPILENE COPOLIMERO
- LATCHES: NYLON / SERRATURE IN NYLON
- O-RING: POLYMER / GUARNIZIONE POLIMERO


- INTERNAL CUBIC VOLUME: 53383050 CUBIC MM - 1.885 CUBIC FEET / VOLUME: 53383050 MM CUBI
- VOLUME CAPACITY: 53.38 LT / CAPACITÀ: 53.38 LT
- PCS PER CARTON: 1 / PEZZI PER CARTONE: 1
- WEIGHT OF THE FULL CARTON: 7.32 KG - 16.13 LBS. / PESO DEL CARTONE: 7.32 KG
- MOULDING: INJECTION MOLDED / STAMPAGGIO: AD INIEZIONE
- RANGE TEMPERATURE: -30 / 90°C (-22 / 194°F) / RANGE DI TEMPERATURA: -30 / 90°C (-22 / 194°F)
- ACCESSORIES: CUBED & CONVOLUTED FOAMS - PADDED DIVIDERS - LID ORGANIZER / SPUGNE CUBETTATE & SPUGNE BUGNATE - DIVISORIE IMBOTTITE - TASCA ORGANIZER

IP67 RATING


ATA 300

MIL SPECS


DEF STAN 81-41
STANAG 4280



+



+



=



Base foam

1 x 15 mm / 1 x 0.59 inch


Cubed foam

3 x 60 mm / 3 x 2.36 inch


Convuluted foam

1 x 50 mm / 1 x 1.97 inch


MAX540H245S



+



+



=



Base foam

1 x 15 mm / 1 x 0.59 inch

High Density Cubed foam

3 x 60 mm / 3 x 2.36 inch

Convuluted foam

1 x 50 mm / 1 x 1.97 inch

MAX540H245HDS