




## MAX235H155S-HDS

 258 x 243 x H167.5 mm  
10.16 x 9.56 x H6.59 inch.

 235 x 180 x H156 mm  
9.25 x 7.08 x H6.14 inch.

 25 + 131 mm  
0.98 + 5.16 inch.

 VERSION S: 1,06 kg / 2.33 lb  
VERSION HDS: 1,27 kg / 2.79 lb

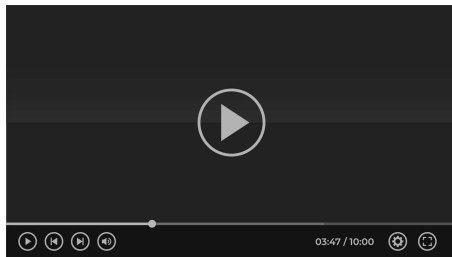

HIGH DENSITY  
CUBED FOAM  
VIDEO



- WATERTIGHT SEAL AROUND LID / GUARNIZIONE ERMETICA
- AUTOMATIC PRESSURE RELEASE VALVE / VALVOLA AUTOMATICA DI PRESSURIZZAZIONE
- EASY TO OPEN DOUBLE THROW LATCHES / CHIUSURE DI SICUREZZA A DOPPIO STEP
- LOAD TESTED SOFT GRIP HANDLE / MANICO MORBIDO AD ALTA ERGONOMICITÀ
- STACKABLE INTERLOCKING SYSTEM / SISTEMA DI IMPILABILITÀ
- THICK BODY MATERIAL / PARETI SPESSE ANTIURTO
- EXTRA FIXING POINTS / PUNTI DI FISSAGGIO PER VARIE APPLICAZIONI
- FULLY LENGTH HINGES / CERNIERA LUNGO TUTTO IL PROFILO DELLA VALIGIA
- NYLON PINS, CORROSION FREE / PERNI IN NYLON ANTI CORROSIONE
- SCREEN PRINTING AND RESIN LABEL SPACE / SERIGRAFIA ED ETICHETTA RESINATA
- MATERIAL: POLYPROPYLENE COPOLYMER / MATERIALE: POLIPROPILENE COPOLIMERO
- LATCHES: NYLON / SERRATURE IN NYLON
- O-RING: POLYMER / GUARNIZIONE POLIMERO


- INTERNAL CUBIC VOLUME: 6598800 CUBIC MM - 0.2330 CUBIC FEET / VOLUME: 6598800 MM CUBI
- VOLUME CAPACITY: 6.59 LT / CAPACITÀ: 6.59 LT
- PCS PER CARTON: 4 / PEZZI PER CARTONE: 4
- WEIGHT OF THE FULL CARTON: 4.92 KG - 10.84 LBS. / PESO DEL CARTONE: 4.92 KG
- MOULDING: INJECTION MOLDED / STAMPAGGIO: AD INIEZIONE
- RANGE TEMPERATURE: -30 / 90°C (-22 / 194°F) / RANGE DI TEMPERATURA: -30 / 90°C (-22 / 194°F)
- ACCESSORIES: CUBED & CONVOLUTED FOAMS / SPUGNE CUBETTATE & SPUGNE BUGNATE

**IP67** RATING


**ATA 300**

**MIL SPECS**

DEF STAN 81-41  
STANAG 4280



+



+



=



**Base foam**

1 x 30 mm / 1 x 1.18 inch

**Cubed foam**

2 x 50 mm / 2 x 1.97 inch


**Convuluted foam**

1 x 22 mm / 1 x 0.87 inch


**MAX245H155S**



+



+



=



**Base foam**

1 x 30 mm / 1 x 1.18 inch

**High Density Cubed foam**

2 x 50 mm / 2 x 1.97 inch

**Convuluted foam**

1 x 22 mm / 1 x 0.87 inch

**MAX245H155HDS**