



1	2	3	4	5	6	7	8	9	10	
CUSTOMER NAME						DATE	REV	DESCRIPTION		BY
CUSTOMER Part No.						2013.09.26	A/0	NEW		Vinci

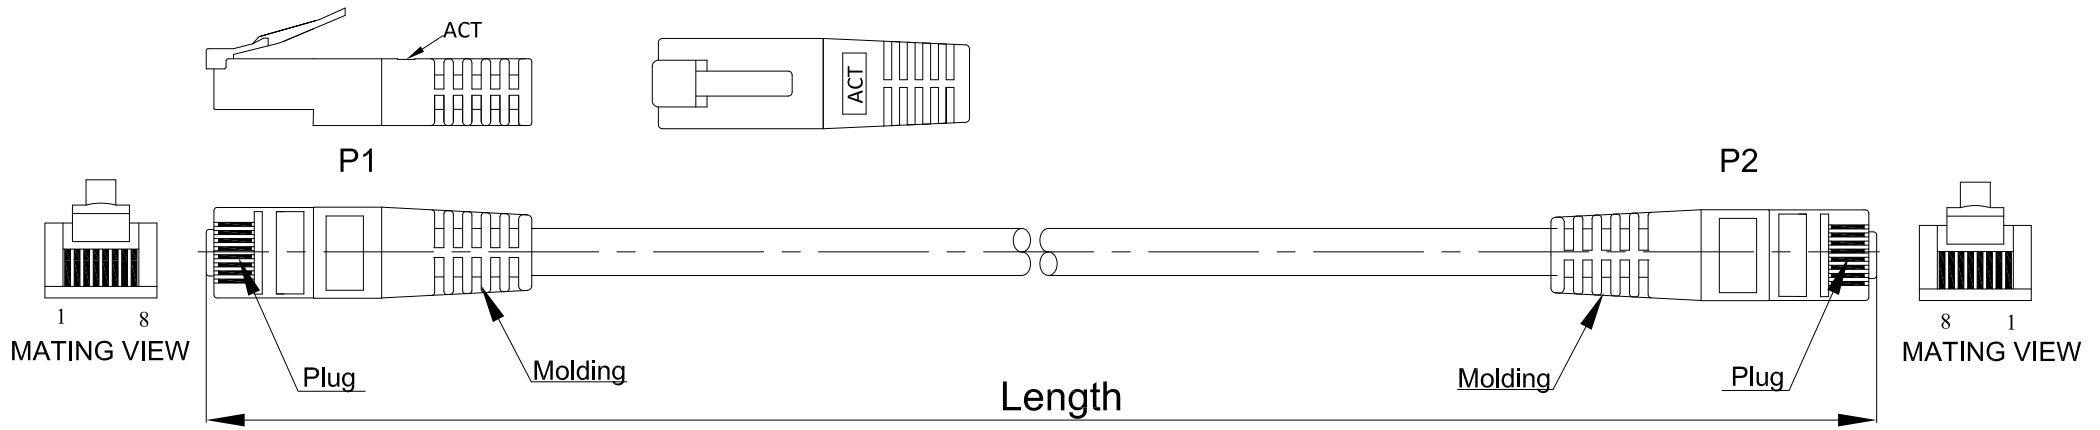

Marking: CAT.6A SSTP LSOH 26AWGX4P PATCH 3P VERIFIED TO ISO/IEC 11801 ED.2 (FP0036) & ANSI/TIA-568-C.2 & IEC 60332-1-2

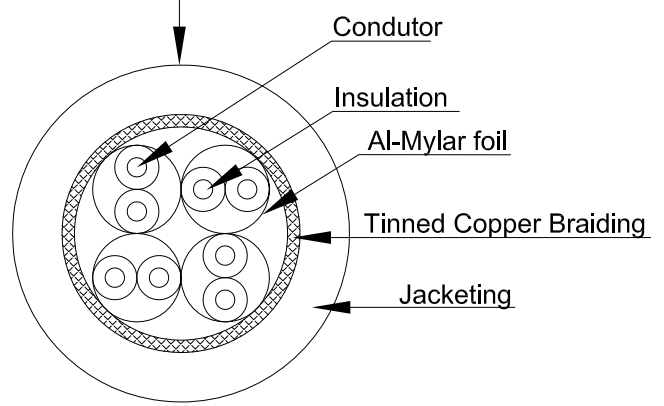

orange 2	green 3
white/orange	white/green
blue 1	brown 4
white/blue	white/brown

PA/R	PINOUT		
	P1(T568B)	WIRE	P2(T568B)
1	1	WHT/ORG	1
	2	ORG	2
2	3	WHT/GRN	3
	6	GRN	6
3	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

Conductor	Bare Copper 26AWG
Insulation	Thickness:MIN at any point:0.20mm MAX AVG:0.35mm Diameter:1.05±0.06mm
Jacket	LSOH Thickness:MIN at any point:0.50mm MAX AVG:0.60mm Diameter:5.8±0.20mm
Wire	CAT.6A SSTP 26AWGX4P
Plug	YUS-06 8P8C 50u"

Key Size	△	3RD	⊕
Length (mm)	Tolerance		
	Critical	Normal	General
0-15	±0.05	±0.10	±1.0
15-60	±0.10	±0.20	
60-150	±0.15	±0.35	±1.5
150-350	±0.20	±0.50	
350-1000	±0.40	±0.65	±2.0




Part No.	IB36XX, IB40XX, IB50XX, IB53XX, IB74XX, IB91XX, IB92XX			
Description	CAT.6A SSTP 26AWGX4P YUS-06 LSOH L-691			
UNIT	mm	APPROVAL	CHECKER	DRAWER
PAGE	1/2			Vinci
Draw.No.				

1	2	3	4	5	6	7	8	9	10
CUSTOMER NAME						DATE	REV	DESCRIPTION	BY
CUSTOMER Part No.						2013.09.26	A/0	NEW	Vinci

Part No.	Color	Length	Part No.	Color	Length	Part No.	Color	Length	Part No.	Color	Length	
IB3652	IVORY	250±30mm	IB5000	RED	500±30mm	IB7400	GREEN	500±30mm	IB9200	BLACK	500±30mm	
IB3600		500±30mm	IB5001		1000±30mm	IB7401		1000±30mm	IB9201		1000±30mm	
IB3601		1000±30mm	IB5051		1500±30mm	IB7451		1500±30mm	IB9251		1500±30mm	
IB3651		1500±30mm	IB5002		2000±30mm	IB7402		2000±30mm	IB9202		2000±30mm	
IB3602		2000±30mm	IB5003		3000±50mm	IB7403		3000±50mm	IB9203		3000±50mm	
IB3603		3000±50mm	IB5005		5000±50mm	IB7405		5000±50mm	IB9205		5000±50mm	
IB3605		5000±50mm	IB5007		7000±150mm	IB7407		7000±150mm	IB9207		7000±150mm	
IB3607		7000±150mm	IB5010		10000±150mm	IB7410		10000±150mm	IB9210		10000±150mm	
IB3610		10000±150mm	IB5300		500±30mm	IB9100		500±30mm	ITEM		Color	RAL NO.
IB3615		15000±150mm	IB5301		1000±30mm	IB9101		1000±30mm	IB36XX		IVORY	RAL 1015
IB3620	20000±150mm	IB5351	1500±30mm	IB9151	1500±30mm	IB40XX	GREY	RAL 7045				
IB3625	25000±150mm	IB5302	2000±30mm	IB9102	2000±30mm	IB50XX	RED	RAL 3018				
IB3630	30000±150mm	IB5303	3000±50mm	IB9103	3000±50mm	IB53XX	BLUE	RAL 5012				
IB4052	GREY	250±30mm	IB5305	BLUE	5000±50mm	IB9105	YELLOW	5000±50mm	IB74XX	GREEN	RAL 6018	
IB4000		500±30mm	IB5307		7000±150mm	IB9107		7000±150mm	IB91XX	YELLOW	RAL 1018	
IB4001		1000±30mm	IB5310		10000±150mm	IB9110		10000±150mm	IB92XX	BLACK	RAL 9011	
IB4051		1500±30mm										
IB4002		2000±30mm										
IB4003		3000±50mm										
IB4005		5000±50mm										
IB4007		7000±150mm										
IB4010		10000±150mm										
IB4015		15000±150mm										
IB4020	20000±150mm											
IB4025	25000±150mm											
IB4030	30000±150mm											

Key Size		3RD	
Length (mm)	Tolerance		
	Critical	Normal	General
0-15	±0.05	±0.10	±1.0
15-60	±0.10	±0.20	
60-150	±0.15	±0.35	±1.5
150-350	±0.20	±0.50	
350-1000	±0.40	±0.65	±2.0



Part No.	IB36XX, IB40XX, IB50XX, IB53XX, IB74XX, IB91XX, IB92XX			
Description	CAT.6A SSTP 26AWGX4P YUS-06 LSOH L-691			
UNIT	mm	APPROVAL	CHECKER	DRAWER
PAGE	2/2			Vinci
Draw.No.				